

NOISE RATING

MANUFACTURER: Bereco Ltd.

PRODUCT NAME: Traditional Flush Casement Timber Window
– 8.8/16/9.5mm

SCOPE REFERENCE: NRW-0245



Sound Reduction Value (R_w): (BS EN 10140 – 2)	42 dB
Correction for traffic and low frequency (C_{tr}):	-5 dB

Frequency (Hz):	125	250	500	1000	2000	4000
Measured performance:	27.5	36.5	41.1	42.2	44.9	50.7

This Bluesky Noise Rating rating must be read in conjunction with the scope of certification that is referenced above and does not guarantee the performance of individual products. Visit www.blueskycert.com for further details.

Bluesky
Certification

NOISE RATING

MANUFACTURER: Bereco Ltd.

PRODUCT NAME: Traditional Flush Casement Timber Window
– 8.8/20/6mm

SCOPE REFERENCE: NRW-0235



Sound Reduction Value (R_w): (BS EN 10140 – 2)	41 dB
Correction for traffic and low frequency (C_{tr}):	-6 dB

Frequency (Hz):	125	250	500	1000	2000	4000
Measured performance:	29.5	32.2	39.4	42.4	42.6	46.9

This Bluesky Noise Rating rating must be read in conjunction with the scope of certification that is referenced above and does not guarantee the performance of individual products. Visit www.blueskycert.com for further details.


Bluesky
Certification

NOISE RATING

MANUFACTURER: Bereco Ltd.

PRODUCT NAME: Traditional Flush Casement Timber Window
– 8.8/12/4mm

SCOPE REFERENCE: NRW-0232

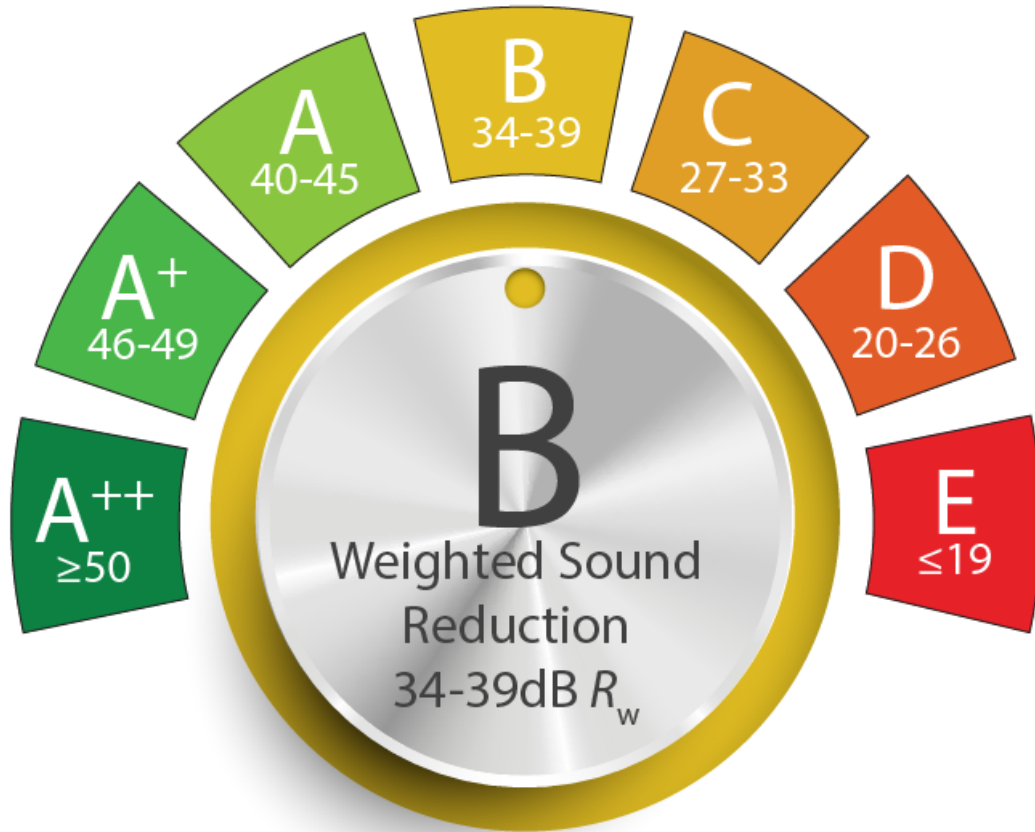

Sound Reduction Value (R_w): (BS EN 10140 – 2)	38 dB
Correction for traffic and low frequency (C_{tr}):	-4 dB

Frequency (Hz):	125	250	500	1000	2000	4000
Measured performance:	29.5	25.5	34.9	40.7	45.7	44.5

This Bluesky Noise Rating rating must be read in conjunction with the scope of certification that is referenced above and does not guarantee the performance of individual products. Visit www.blueskycert.com for further details.


Bluesky
certification

NOISE RATING

MANUFACTURER: Bereco Ltd.

PRODUCT NAME: Traditional Flush Casement Timber Window
– 4/16/4mm

SCOPE REFERENCE: NRW-0242

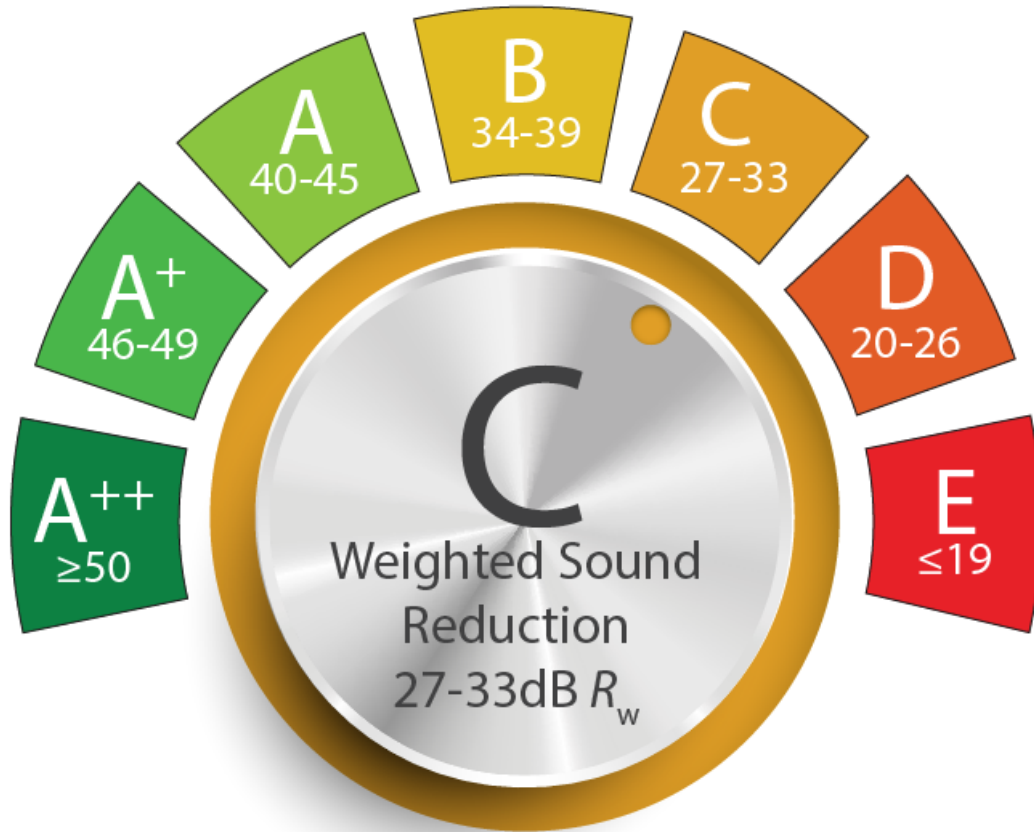

Sound Reduction Value (R_w): (BS EN 10140 – 2)	33 dB
Correction for traffic and low frequency (C_{tr}):	-5 dB

Frequency (Hz):	125	250	500	1000	2000	4000
Measured performance:	25.1	19	28.1	36.4	42	40.7

This Bluesky Noise Rating rating must be read in conjunction with the scope of certification that is referenced above and does not guarantee the performance of individual products. Visit www.blueskycert.com for further details.

Bluesky
Certification